


<b>Type of Appliance</b>	Temperature controlled, continuous flow, gas hot water system
<b>Rinnai Model Number</b>	REU-VA2535FFUD
<b>Operation</b>	With or without remote controls, mounted in kitchen, bathroom, etc.
<b>Exhaust System</b>	Direct vent, forced combustion
<b>Minimum/Maximum Gas Rate (Input)</b>	15,000 - 199,000 BTU/h (Natural Gas) 15,000 - 190,000 BTU/h (Propane)
<b>Electrical</b>	Appliance: AC 120 Volts - 60 Hz Remote Control: DC 12 Volts
<b>Electrical Consumption</b>	Normal 79 watts Standby 2.8 watts Anti-frost protection 100 watts
<b>Ignition System</b>	Direct electronic ignition
<b>Hot Water Capacity</b>	0.6 to 9.4 GPM (35° F rise)
<b>Temperature</b>	98° - 140° F (98° - 185° F available with the MCC-91 controller for commercial and hydronic applications)
<b>Temperature (without remote)</b>	120° F (factory default)
<b>Approved Gas Types</b>	Natural or Propane (ensure unit matches gas type)
<b>Installation</b>	Indoor only
<b>Energy Factor</b>	Natural Gas: 0.82 Propane: 0.82
<b>Thermal Efficiency</b>	Natural Gas: 84% Propane: 84%
<b>Service Connections</b>	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
<b>Water Flow Control</b>	Water flow sensor, electronic water control and by-pass control
<b>Minimum/Maximum Water Supply Pressure</b>	20 - 150 PSI (50 PSI or above is recommended for maximum flow)

**FLOW TABLE**

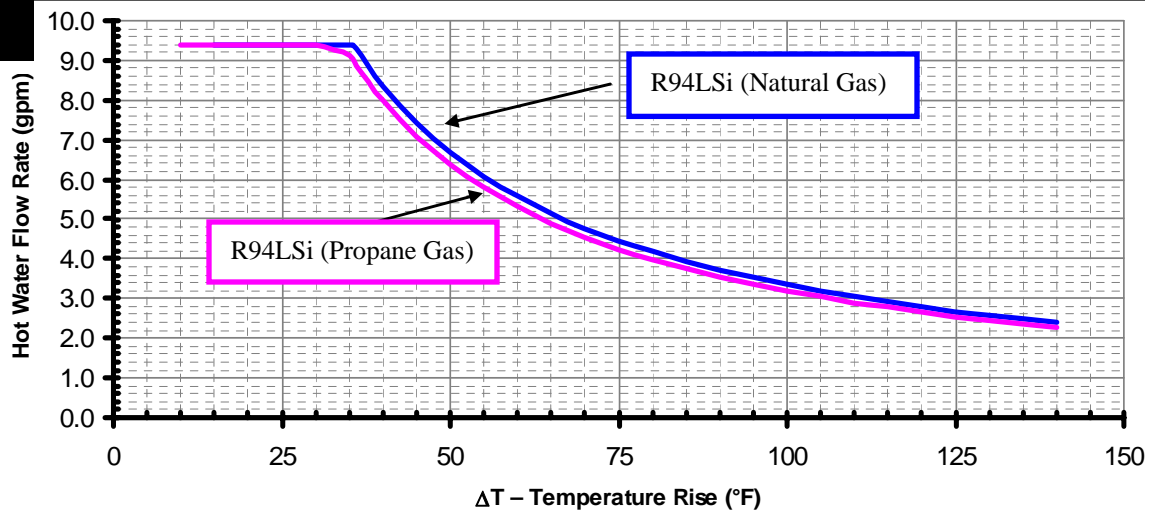

### Water Temperature Control

### Remote Controls

Simulation feed forward and feedback

MC-91-1US (included)  
 Deluxe controller: MC-100V-1US (optional)  
 Bathroom controller: BC-100V-1US (optional)  
 Wireless controller: MC-502RC-1US-MS (optional)  
 MCC-91-1US (for commercial applications)

98° - 140° F  
 98° - 185° F

### Remote Control Cable

Non-polarized two-core cable, minimum 22 AWG

### Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse (3 amp)
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

### Clearances from Combustibles (suitable for closet, attic, and crawl space installations)

- Top of heater - 6 inches
- Front of heater - 6 inches
- Sides of heater - 2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

### Clearances from Non-combustibles

- Top of heater - 2 inches
- Front of heater - 6 inches
- Sides of heater - 1/2 inch
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

### Min. / Max. Gas Supply Pressure

Natural Gas: min 5" W.C. max 10.5" W.C.  
 Propane Gas: min 8" W.C. max 13.5" W.C.

### Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 3.3" W.C. low fire 0.52" W.C.  
 Propane Gas: high fire 5.0" W.C. low fire 0.92" W.C.

### NOx

Meets California and Texas NOx Emission Rules

### Warranty

Heat exchanger: 12 years\* for residential and 5 years\* for commercial and hydronic applications; (10 years\* if used with the Rinnai Hydronic Air Handler); all other parts 5 years\*; labor 1 year; (\* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

*Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.*

